


Resistance thermometer TYPE PTI



For insertion


- Insertion thermometer - for measurement of temperatures in e.g. meat and fruit.
- Measuring inset according to IEC 751, standard Cl. B 1/6 DIN.
- Protective sheath of 6 mm stainless steel, length 75 mm.
- The connection cable is standard a 4 cond. neopren cable, Ø9 mm. Ø6 teflon cable for super freeze.
- Standard without connection box. Available with a white-enamelled marine box of light-alloy metal, protection IP67.
- Response time (mean values) measured at velocities in: water at 0.4 m/s: $\tau_{0.5} = 7$ sec.
- Recommended measuring current: max. 2 mA.

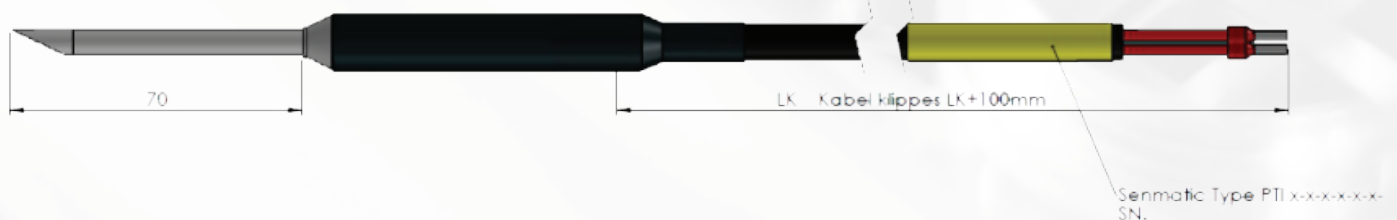

Ordering: See ordering form on back page

ORDERING FORM / RESISTANCE THERMOMETER *

TYPE PTI

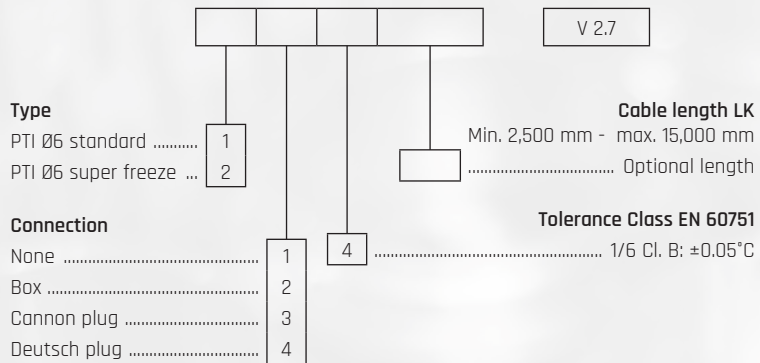

Connection diagram:



*Some configurations are unavailable. Your Senmatic sales person will notify you if you have made an incorrect selection.